





- 轴与轴连接 Shaft-to-shaft-connection
- 扭向弹性力矩限制器 Torsionally flexible safety clutch
- 轴向插入，安装方便 Axial plug-in
- 能补偿安装偏差 Able to compensate for misalignment
- 可装在设备上调节打滑力矩 Torque can be set while in place
- 成品孔径公差按照ISO标准为H7，键槽宽公差按照标准为JS9  
Finish bore according to ISO fit H7, feather keyway according to DIN 6885 sheet 1 - Js9

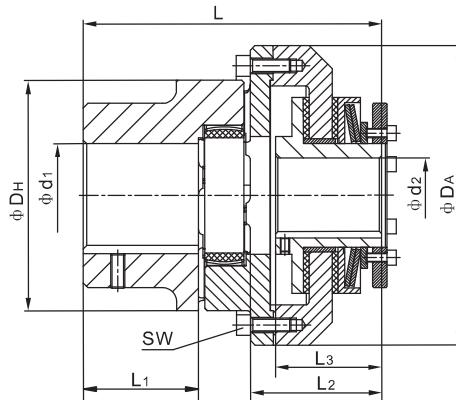

◇ 扭力限制型联轴器的尺寸 Capacity and Dimension of Torque Limiter Coupling

尺寸:(mm)  
Dimensions in mm

型号 Model	扭矩范围 Torque Range (Nm)	最高转速 Max. speed Unbalanced rpm	d <sub>1</sub>	d <sub>2</sub>	DA	DH	L	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	SW
CTL200-1S1	2.9~9.8	1800	6-19	8-14	70	40	77	25	36	29	6-M4
CTL200-2S1	6.9~20										
CTL250-1S2	6.9~27	1800	8-24	10-22	87	55	106	30	58	48	6-M5
CTL250-2S2	14~54										
CTL350-1S3	20~74	1800	10-28	17-25	118	65	129	35	74	62	6-M6
CTL350-2S3	34~149										
CTL500-1S5	47~210	1800	14-42	20-42	158	95	166	50	90	76	8-M8
CTL500-2S5	88~420										
CTL700-1S8	116~569	1400	22-65	30-64	216	135	225	75	115	98	8-M10
CTL700-2S8	223~1080										
CTL1016-1S10	400~1240	1400	40-90	30-72	300	200	284	100	139	115	8-M12
CTL1024-2S10	590~1860										

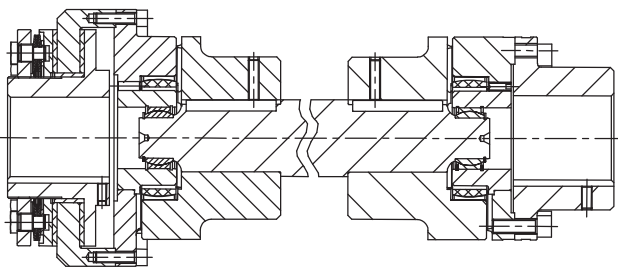

- 带中间轴联轴器  
as intermediate shaft coupling
- 适合较大的轴间距离  
for large shaft distance dimensions
- 可和钢膜片联轴器组装  
available in combination with or steel lamina couplings

◇ 订货描述示例:

Order form:

CTL350-1S3	φ 20/ φ 24	φ 20/ φ 24键槽 φ 28/ φ 40keyway
规格与型号 Size/type of joint	联轴器孔径/扭力限制器孔径 Coupling H7 / CTL H7	成品孔径(H7)键槽按GB/T3852-1997(JS9)标准 Finish bore (H7) Keyway toGB/T3852 sheet 1997(JS9)