


GR联轴器弹性缓冲垫

ELASTIC BUFFERS USED IN GR TURRET SHAFT COUPLING

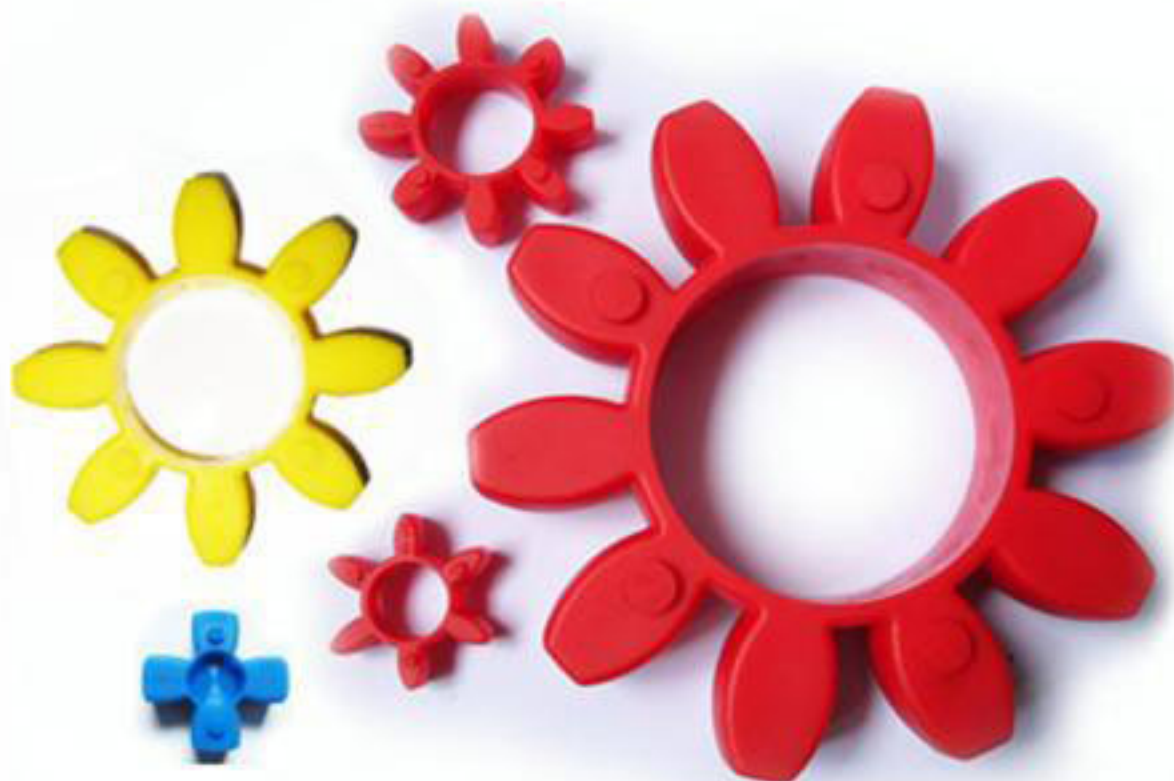

产品用途:

本产品适用于各种传动机械用于传动轴联接的联轴器缓冲垫。

扭矩: 22.4-2500NM

磨损: $<0.05\text{cm}^3/1.61\text{km}$

产品硬度:

蓝色85A 黄色92A 红色95A 98A 灰绿64D

使用温度: $-40\sim 100^\circ\text{C}$

标准来源: 德国KTR

USAGE:

This products is apply to machanical shaft copuling,buffered act on the joint of the transmission shaft.

Pitch strand:22.4~2500NM

Wear tear: $<0.05\text{cm}^3/1.61\text{km}$

Hardness:

blue SHA85 yellow SHA92 red SHA95 98
sage green SHD64

Temperature: $-40\sim 100^\circ\text{C}$

Standard:KTR,Germany

规格型号	材料	外径	内径	厚度	厚度	瓣数
SIZE	Material	OD	ID	H	H1	Lamella QTY
GR-14	PU	30	10.5	12	10	4
GR-19	PU	40	18	15	12	6
GR-24	PU	55	27	16.8	14	8
GR-28	PU	65	30	19	15	8
GR-38	PU	80	38	22	18	8
GR-42	PU	95	46	24	20	8
GR-48	PU	104	51	26	21	8
GR-55	PU	120	60	27	22	8
GR-65	PU	135	68	32	26	8
GR-75	PU	161	81	37	30	10
GR-90	PU	199	100	42	34	10
GR-100	PU	224	111	—	38	10