
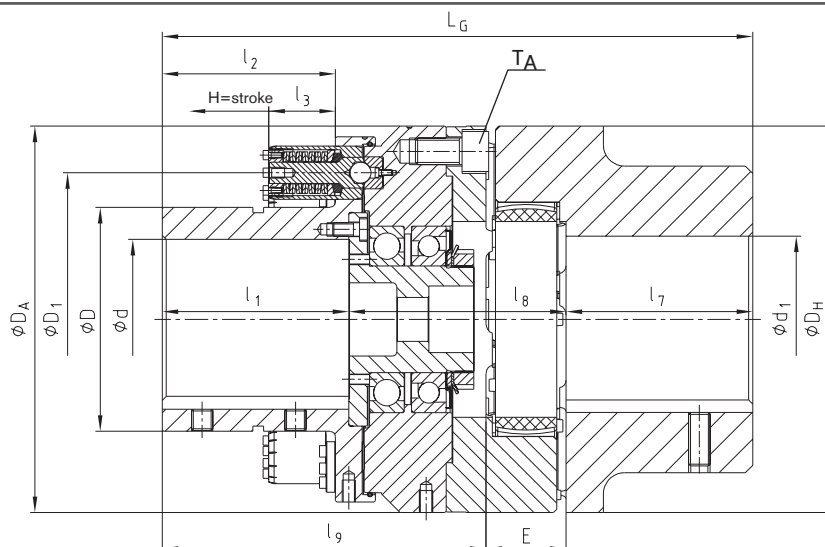


With torsionally flexible jaw coupling



Torques [Nm]							
Size	Type of element	3 idle rotation elements		6 idle rotation elements		9 idle rotation elements	
		min.	max.	min.	max.	min.	max.
9	1T2	1000	4000	2000	8000	-	-
	1T3	2000	5500	4000	11000	-	-
12	1T2	1300	5000	2600	10000	3900	15000
	1T3	2400	6700	4800	13400	7200	20100
15	1T2	1700	6000	3400	12000	5100	18000
	1T3	3000	8200	6000	16400	9000	24600
20	2T2	5000	15000	10000	30000	15000	45000
	2T3	10000	20000	20000	40000	30000	60000

Technical data – Dimensions																						
Size <sup>1)</sup>	Jaw coupling G				Max. bore		Dimensions [mm]													TA [Nm]	Speed [RPM]	Weight with max. bore [kg]
	Size	Torque [Nm] 64 Sh-D		d	d1	D	D1	DH	DA	l1	l2	l3	l7	l8	l9	E	LG	H=stroke				
		TKN	TKmax																			
9	90	4500	9000	90	110	135	185	200	260	120	110	50	100	133	208	45	353	5,3	117	3300	57	
12	125	12500	25000	120	125	173	225	290	290	146	130	50	140	165	245	60	445	5,3	560	2300	108	
15	140	16000	32000	150	160	215	270	320	324	170	160	50	155	176	281	65	501	5,3	560	2050	142	
20	180	35000	70000	200	200	285	370	420	460	220	200	78	195	227	362	85	642	9	970	1550	331	

<sup>1)</sup> Other sizes available on request

Ordering example:	TT-FRE12	1T3	9	d Ø85	G125	d1 Ø85	12000 Nm
	Type / size	Type of element	Number of idle rotation elements	TT-FRE bore	Coupling type / size	Coupling bore	Torque set