


TT-KS25

1.0 Feature

1. 12/24VDC
2. Ø25mm Dia
3. Max force 500N
4. Stainless steel material
5. Robust Planetary gear motor
6. Current overload protection switch
7. Hall sensor for option
8. Noise: ≤ 55 db
9. IP65
10. Hall sensor for option



2.0 Dimension

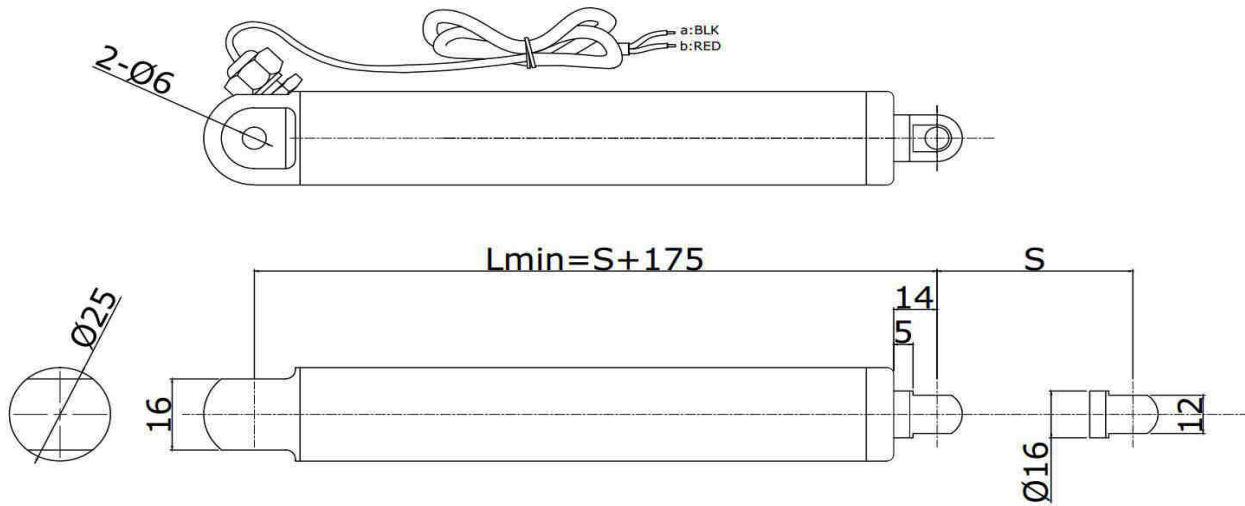

Stroke	30-200	201-300	301-500
Length	S+175	S+195	S+205

3.0 Specification

Code	Rated Load (N)	Speed (mm/s) $\pm 10\%$		Current (A)			
				12V		24V	
		No load	Full load	No load	Full load	No load	Full load
A	300N	10	8	0.28	1.4	0.15	0.7
B	500N	7	5.2	0.25	1.5	0.12	0.8